


SSQ LOADER



SSQ LOADER



DIMENSIONS AND LOADING DIAGRAMS*

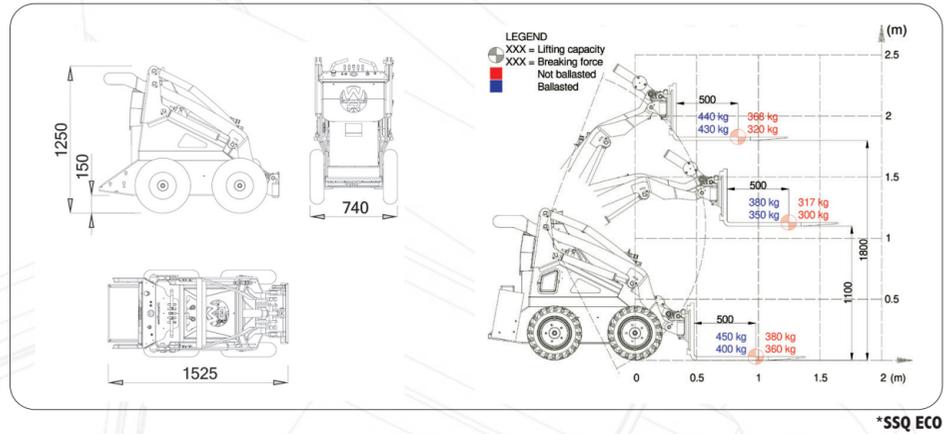

WHEELS



INDUSTRIAL FORKLIFT FORKLIFT NON MARKING TRACTOR SKID ALL TRAC TURF

THE SSQ SERIES

	LIFTING CAPACITY	ENGINE POWER	HYDRAULIC SYSTEM	BOOM HEIGHT
WORKYQUAD SSQ 11	280 Kg (with counterweights)	11,7 Hp	21,6 l/min	2050 mm
WORKYQUAD SSQ 15	340 Kg (with counterweights)	14,8 Hp	25,6 l/min	2110 mm
WORKYQUAD SSQ 22	350 Kg (with counterweights)	22,1 Hp	35 l/min	2100 mm
WORKYQUAD SSQ ECO	450 Kg (with counterweights)	5,7 Kw	18,5 l/min	2042 mm

WORKYQUAD
MINILOADERS

CAST GROUP SRL
 Via A. Meucci, 18 I-30035 MIRANO VE
 ph. +39041 5701827 fx +39041 5726786
 info@cast-group.it

SSQ LOADER >>>

SSQ 11
 SSQ 15
 SSQ 22
 SSQ ECO



www.workyquad.it

EN

LEAF_WORKYQUAD_ENG_09/2022_A0000000035

Data contained in this document is subject to change without notice and/or modification. Cast Group reserves the right to modify its products without obligation to communications. The images in this document are only a demonstrative purpose.

>>>>
SSQ LOADER

Reduced size and reliability: these are the strengths of the SSQ models. With the SSQ Skid Steer, the hard manual work becomes just an old memory. Thanks to its small size, the SSQ can easily pass through doors, gates, horseshoes and narrow passages in general. The range of SSQ allows to satisfy the most varied needs of the customers by diversifying the product according to the needs to be met and the work to be done: agriculture, maintenance of the stables, gardening and greening, small construction and demolition work are some of the activities where the SSQ, thanks to the interchangeability of its many attachments, can operate with ease and in absolute simplicity and safety.



Small size,
 superior reliability.

>>>>
SSQ 11
 • COUNTRY
 • PLUS

Honda engine GX390, displacement 389 cc.
 Number of cylinders: 1
 Start: electric
 RPM: 3600
 Cooling: air
 Fuel: Petrol Euro 95
 Fuel tank capacity: 6 liters
 Hydraulic system: 21,6 l/min - 200 bar
 Hydraulic oil tank capacity: 44 liters
 Steering: skid
 Weight: 600 Kg

SSQ 15
 DIESEL



Kubota engine Z602, displacement 599 cc.
 Number of cylinders: 2
 Start: electric
 RPM: 3200
 Cooling: liquid
 Fuel: Diesel
 Fuel tank capacity: 25 liters
 Hydraulic system: 25,6 l/min - 200 bar
 Hydraulic oil tank capacity: 25 liters
 Steering: skid
 Weight: 684 Kg

Also available in
 radio controlled version.



SSQ 22



Honda engine HGX690, displacement 688 cc.
 Number of cylinders: 2
 Start: electric
 RPM: 3600
 Cooling: air
 Fuel: Petrol Euro 95
 Fuel tank capacity: 15 liters
 Hydraulic system: 35 l/min - 200 bar
 Hydraulic oil tank capacity: 44 liters
 Steering: skid
 Weight: 630 Kg



- Agriculture
- Breeding
- Green maintenance
- Building
- Road maintenance



SSQ ECO

Engine: Permanent magnets
 RPM: 2500
 Type of battery: Traction battery
 Battery capacity / voltage: 240 Ah / 36V
 Hydraulic system: 18,5 l/min - 200 bar
 Oil tank capacity: 18 liters
 Steering: Skid
 Weight: 850 Kg



100% Ecological!

The electric version of the SSQ series respect the environment. Zero emissions, for cleaner air and ecological batteries with improved safety, free from liquid leaks. Charging times are approximately 7 hours, while the charge autonomy at average working regime is 7 hours.