

機種一覽

8 K - M 5 6 6 ☐

- ・出力トルク

・駆動電流

- C; 0.35A/相
- S; 0.75A/相
- M; 1.4A/相
- G; 2.8A/相

W 空欄;片軸
W 両軸


・長さ

住

·外形寸法

例] 6:60□

・5相ステップングモーター

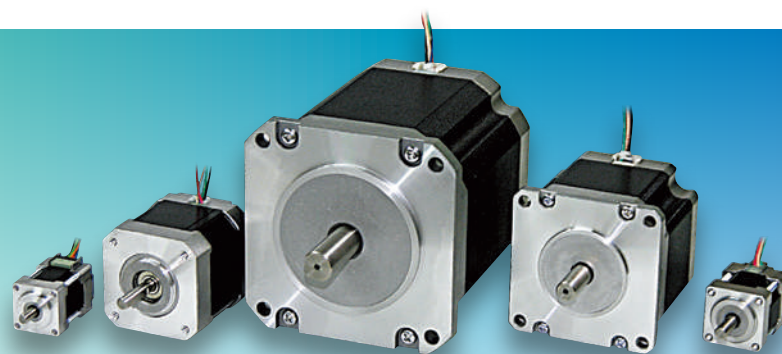

RoHS

※トルクの単位 $(\text{g}\cdot\text{cm})=980\times(\text{N}\cdot\text{m})$, $(\text{kg}\cdot\text{cm})=9.8\times(\text{N}\cdot\text{m})$

型式 (両軸は末尾 にWを追記)	ホールディングトルク N・m	定格電流 A/相	巻線抵抗 Ω	ロータイナーシャ gcm ²	モーターの長さ; L mm	質量	外形寸法 mm
01K-C513	0.013	0.35	6.1	1.9	30	50g	20□
02K-C515	0.024		11.4	4	46.5	85g	20□
02K-C523	0.018		4.5	4.2	30.5	70g	24□
04K-C525	0.029		6.7	8.3	46.5	120g	24□
1K-C543	0.13		7.5	35	33	200g	42□
2K-C544	0.18		9.5	54	39	240g	42□
3K-C545	0.24		10.3	68	47	310g	42□


02K—S523	0.018	0.75	1.1	4.2	30.5	70g	24□
04K—S525	0.029		1.7	8.3	46.5	120g	24□
1K—S543	0.13		1.7	35	33	200g	42□
2K—S544	0.18		2.2	54	39	240g	42□
3K—S545	0.24		2.2	68	47	310g	42□
4K—S564	0.46		2.6	175	48.5	500g	60□
8K—S566	0.82		3.4	220	56.5	700g	60□

3K—M545	0.24	1.4	0.65	68	47	310g	42□
4K—M564	0.46		0.8	175	48.5	500g	60□
8K—M566	0.82		1.1	220	56.5	700g	60□
16K—M569	1.53		1.8	440	86.5	1.2kg	60□
21K—M596	2.14		1.76	900	64.5	1.8kg	86□
41K—M599	4.18		2.73	2 k	96.5	3 kg	86□


16K—G569	1.53	2.8	0.65	440	86.5	1.2kg	60□
21K—G596	2.14		0.57	900	64.5	1.8kg	86□
41K—G599	4.18		0.67	2 k	96.5	3 kg	86□
63K—G5913	6.43		0.85	3 k	126.5	4 kg	86□

外形寸法(単位mm)


20mm角

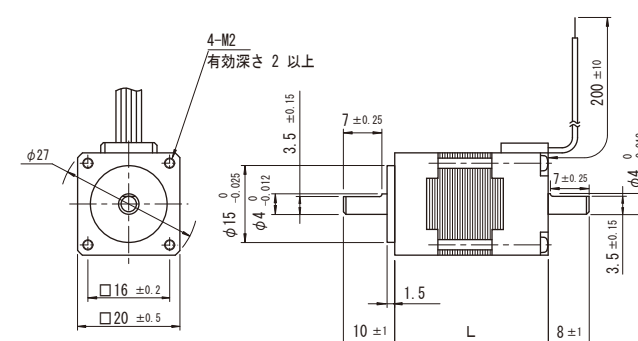


60mm角

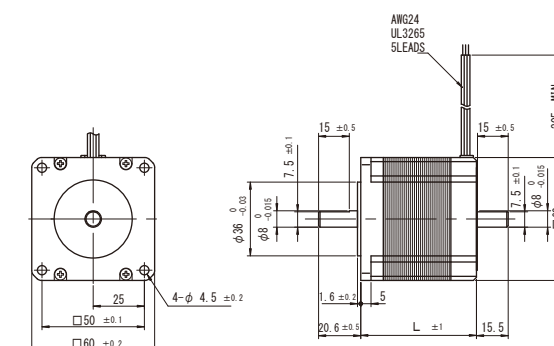

24mm角

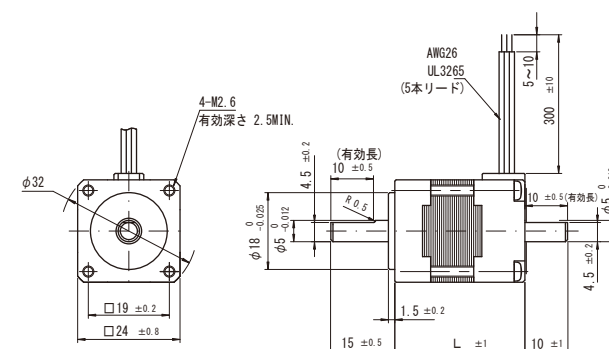

86mm角

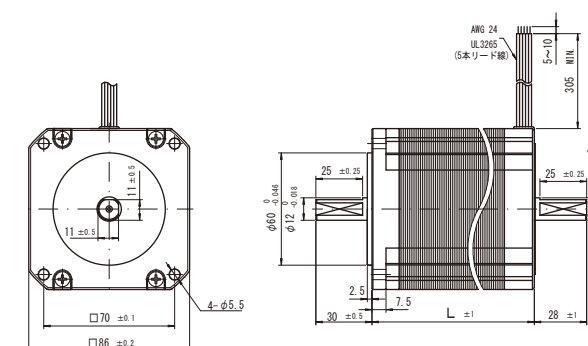

42mm角

