


SSQ LOADER



SSQ LOADER



DIMENSIONS AND LOADING DIAGRAMS*

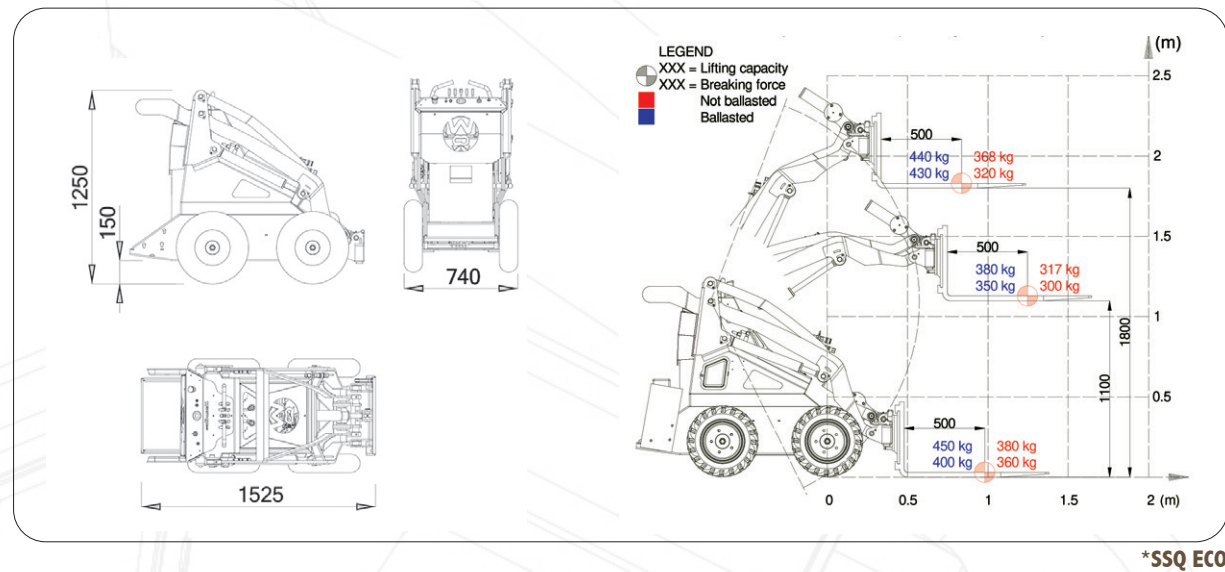

WHEELS



INDUSTRIAL FORKLIFT FORKLIFT NON MARKING TRACTOR SKID ALL TRAC TURF

THE SSQ SERIES

	LIFTING CAPACITY	ENGINE POWER	HYDRAULIC SYSTEM	BOOM HEIGHT
WORKYQUAD SSQ 11	280 Kg (with counterweights)	11,7 Hp	21,6 l/min	2050 mm
WORKYQUAD SSQ 15	340 Kg (with counterweights)	14,8 Hp	25,6 l/min	2110 mm
WORKYQUAD SSQ 22	350 Kg (with counterweights)	22,1 Hp	35 l/min	2100 mm
WORKYQUAD SSQ ECO	450 Kg (with counterweights)	5,7 Kw	18,5 l/min	2042 mm

WORKYQUAD
MINILOADERS

CAST GROUP SRL
Via A. Meucci, 18 I-30035 MIRANO VE
ph. +39041 5701827 fx +39041 5726786
info@cast-group.it

LEAF_WORKYQUAD_ENG_07/2021

Data contained in this document is subject to change without notice and/or modification. Cast Group reserves the right to modify its products without obligation to communications. The images in this document are only a demonstrative purpose.

SSQ LOADER >>>>

SSQ 11
SSQ 15
SSQ 22
SSQ ECO



www.workyquad.it

en

>>>> SSQ LOADER



Small size,
superior reliability.

SSQ 11

- COUNTRY
- PLUS

Reduced size and reliability: these are the strengths of the SSQ models. With the SSQ Skid Steer, the hard manual work becomes just an old memory. Thanks to its small size, the SSQ can easily pass through doors, gates, horseshoes and narrow passages in general. The range of SSQ allows to satisfy the most varied needs of the customers by diversifying the product according to the needs to be met and the work to be done: agriculture, maintenance of the stables, gardening and greening, small construction and demolition work are some of the activities where the SSQ, thanks to the interchangeability of its many attachments, can operate with ease and in absolute simplicity and safety.



Honda engine GX390, displacement 389 cc.
Number of cylinders: 1
Start: electric
RPM: 3600
Cooling: air
Fuel: Petrol Euro 95
Fuel tank capacity: 6 liters
Hydraulic system: 21,6 l/min / 200 bar
Hydraulic oil tank capacity: 44 liters
Steering: skid
Weight: 630 Kg

**SSQ 15
DIESEL**



Kubota engine Z602, displacement 599 cc.
Number of cylinders: 2
Start: electric
RPM: 3200
Cooling: liquid
Fuel: Diesel
Fuel tank capacity: 25 liters
Hydraulic system: 25,6 l/min / 200 bar
Hydraulic oil tank capacity: 25 liters
Steering: skid
Weight: 684 Kg


Also available in
radio controlled version.



SSQ 22



Honda engine HGX690, displacement 688 cc.
Number of cylinders: 2
Start: electric
RPM: 3600
Cooling: air
Fuel: Petrol Euro 95
Fuel tank capacity: 15 liters
Hydraulic system: 35 l/min / 200 bar
Hydraulic oil tank capacity: 44 liters
Steering: skid
Weight: 630 Kg



Agriculture
Breeding
Green maintenance
Building
Road maintenance



SSQ ECO

Engine: Permanent magnets
RPM: 2500
Type of battery: Traction battery
Battery capacity / voltage: 240 Ah / 36V
Hydraulic system: 18,5 l/min / 200 bar
Oil tank capacity: 18 liters
Steering: Skid
Weight: 850 Kg



100% Ecological!

The electric version of the SSQ series respect the environment. Zero emissions, for cleaner air and ecological batteries with improved safety, free from liquid leaks. Charging times are approximately 7 hours, while the charge autonomy at average working regime is 7 hours.