



Type(s)  
Project  
Date  
Notes

**GENERAL INFORMATION**

The Stage Hog is designed to suit any production environment where a compact but flexible solution is required. Packed with compelling, road-tested features in a ‘headless’ design, the Stage Hog console provides RGB-backlit keys and motorized faders, five high-quality encoders with assignable wheel buttons, user and function keys for console customization as well as dual dashboard multitouch displays. The Stage Hog console includes a built-in backlit alpha keyboard in a locking drawer.

The Stage Hog console is supplied with two standard baby pin mounting points for third-party accessory mounts, which can hold monitors, tablets, cameras or whatever your use requires. The Stage Hog console’s advanced IO options include Neutrik EtherCON and OpticalCON network connections, DMX, MIDI, SMPTE, and USB on USB A- and C-type connections.

**PRODUCT FEATURES**

- Neutrik powerCON® TRUE1 power input and thru
- Two Neutrik EtherCON® Ethernet connections
- Two Neutrik Multimode opticalCON Duo connectors
- USB 3.0 type A (4) and type C (2) connectors
- Wi-Fi and Bluetooth antennas
- Four DMX outputs (5-pin XLR)
- SMPTE input (3-pin XLR)
- MIDI In/Thru/Out
- Desk Light (3-pin XLR, standard pinout)

**ORDERING INFORMATION**

**Stage Hog Console**

MODEL	DESCRIPTION
6112A1001	Stage Hog Console

Stage Hog ships with: TRUE1 power input cable, international power adapter, mouse, dust cover, Capture lighting design software (Quartet) and two accessory mounts with posts.

**Related Products**

MODEL	DESCRIPTION
6113A1001	Gig Hog programming wing
6204A1001	HPU hybrid processing unit
6111K1002	Road case
Various	Response Network Gateways and Interfaces
Free Download	Hog PC Software
4380A1011	ETCnomad USB key, base (2 universes)
4380A1037	ETCnomad USB key, unlocked (12 universes)



## SPECIFICATIONS

### SYSTEM CAPACITY

- 64 Universes

### DISPLAY FUNCTIONS

- Dual 12.5" dashboard displays; six full color function key displays
- Supports two external display port monitors at 1280x1024 minimum resolution, with optional touch or multi-touch control
- User configurable displays with recordable views
- Dedicated views to access most-used items quickly
- Palette, list, views, scenes, batches, effects directories
- Programmer window
- Plot views
- Output window
- Fixture Schedule and Patch windows, sortable by fixture or by universe
- Three color schemes for daylight use, regular use or dark environment use

### PROGRAMMING

- Compact RGB backlit command keypad for quick programming
- Command-line interface
- Programmer Dashboard display for encoder mapping, command line/status display and additional programming tools
- Programmer window displays selected and adjusted fixtures
- Lists constructed with +, -, and Thru or selection softkeys, Next, Back and All commands
- Intensity set with command keypad, full key, intensity palettes
- Ordered groups
- Comprehensive fanning using segments and buddying
- 12 Function keys for user kinds and commands
- Dedicated kind keys and five high-resolution parameter encoders, with two keys per encoder
- Eight user "U-Keys" for user defined functions
- Media picker window
- Hog Color System
- Programmer window
- Groups for simplified fixture selection
- Palettes: intensity, position, colour, beam, effects
- Effects Engine
- Pixelmapping Effects
- Park
- Undo command
- Delete, Move and Copy commands
- Highlight, lowlight and rem dim commands
- Cue level and parameter level timing
- Record, Update and Merge commands
- Knockout and Clear commands
- Set command for text labels and data entry

### PLAYBACK CONTROLS

- Playback Dashboard display for playback bar display, master ranges, and additional playback tools
- 10 pageable, motorized RGB-backlit master playbacks with customizable faders, flash, go, halt, back and choose keys
- Main playback stack including GM, Restart, Assert, Release, Pig, Skip Forward, Skip Backward, Master Pause, and Master Play keys
- Master Ranges for quick reassignment of playback masters content
- Unlimited fader Pages
- Comment macros and keystroke macros
- Paging keys
- Virtual masters
- Scenes
- Batch controllers
- Group masters
- Triggering via Command keys
- Playback expansion via Tour Wing
- OSC input/output, MIDI messages, MIDI Show Control, MIDI/LTC timecode

### INTERFACES AND ACCESSORIES

- Gig Hog programming wing
- HPU hybrid processing unit
- Response network gateways and interfaces
- ETCnomad


### ELECTRICAL AND ENVIRONMENTAL

- ETL, CETL and CE compliance
- Mains power: 100–250 VAC, 50/60 Hz, max 80 W
- Mains connector: Neutrik PowerCON® TRUE1
- Breaker: 7.5 A
- Acoustical rating: TBD dbA

PHYSICAL

Stage Hog Dimensions and Weights

MODEL	HEIGHT		WIDTH		DEPTH		WEIGHT	
	mm	in	mm	in	mm	in	kg	lb
Stage Hog	202	8.0	737	29.0	579	22.8	21.0	46.0

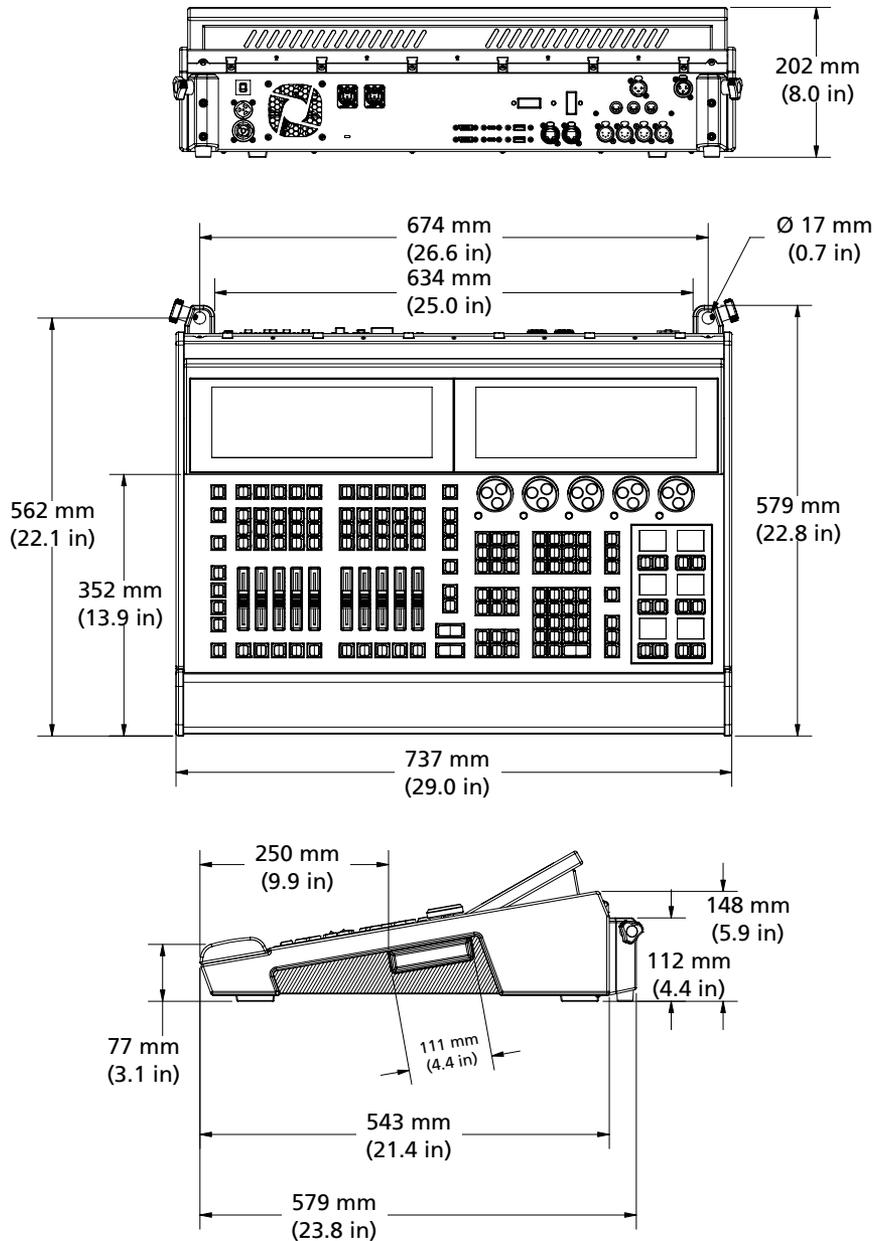

Corporate Headquarters • Middleton, WI USA  
 Global Offices • London, UK • Rome, IT • Holzkirchen, DE • Paris, FR • Hong Kong  
 Dubai, UAE • New York, NY • Orlando, FL • Los Angeles, CA • Austin, TX  
 Copyright©2025 ETC. All Rights Reserved. All product information and specifications subject to change. Rev A 2025-04  
 \*Trademark and patent info: [etconnect.com/IP](http://etconnect.com/IP) • Third-party license agreement info: [etconnect.com/licenses](http://etconnect.com/licenses)