

SORTING GRABS

for excavators from 2.5 to 75 ton

More power in your hands!


Replaceable wear plates (400hb).

Robust and fully integrated rotation.

Relief valve for hydraulic rotation.


Cylinder fully protected from possible debris during demolition.

"Mechanical Stop" on the blade to ensure constant wear recovery.

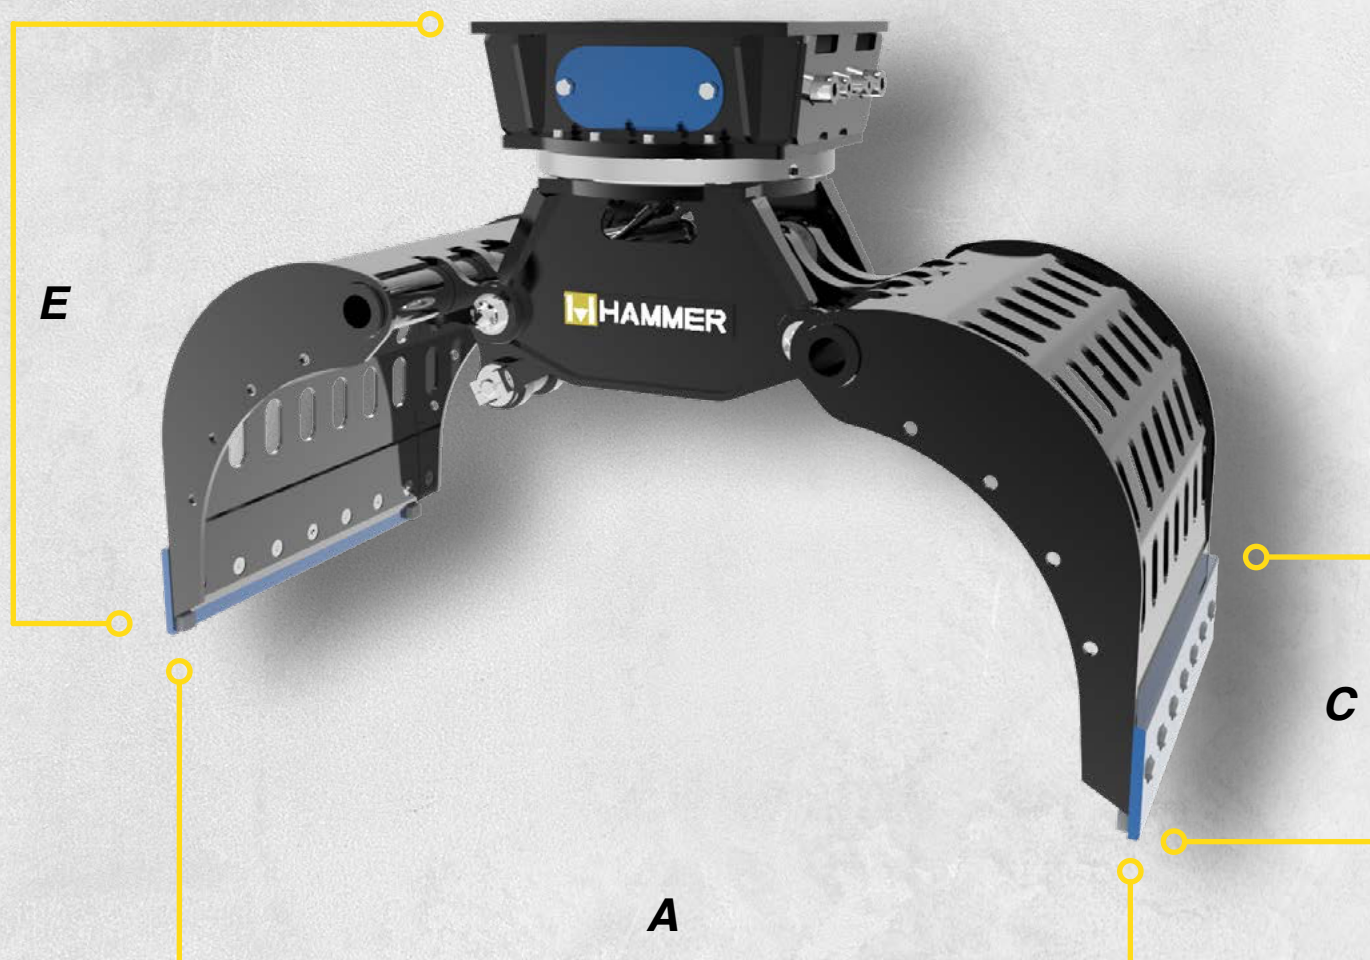

PSG + STANDARD JAW


All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.



Mining
& Quarrying




Demolition
& Renovation



Metallurgic
Industry



Construction



Recycling

Models		PSG12	PRG25	PSG35	PSG50	PSG80	PSG95	PSG110
Carrier Weight	t	2,5-3,5	3,5-4,5	4,5-6	6-10	10-15	13-18	15-21
Weight	kg	140* / 140**	240* / 245**	405* / 425**	445* / 465**	840* / 890**	970* / 1060**	1040* / 1140**
A	mm	800	1160	1400	1545	1760	1950	1950
Height Closed Jaws	mm	745	900	1075	1170	1340	1490	1490
C	mm	450	500	600	700	800	800	920
Width Closed Jaws	mm	550	790	875	930	1070	1180	1180
E	mm	740	810	960	1000	1135	1250	1250
n° of cylinders	n°	1	1	1	1	1	2	2
Cap SAE	m³	0,1	0,15	0,2	0,25	0,4	0,5	0,6
Excavator working pressure	bar	210	250	300	300	320	350	350
Rotation oil flow capacity	l/min.	20	25	40	50	100	120	120
Rotation Pressure	bar	120	120	140	140	210	210	210
Rotation oil flow capacity	l/min.	3	3	5	5	10 / 20***	10 / 20***	10 / 20***

Models		PSG140	PSG200	PSG250	PSG300	PSG400	PSG500
Carrier Weight	t	17-28	24-35	28-45	35-50	45-65	50-75
Weight	kg	1530* / 1655**	1890* / 2030**	2480* / 2715**	2790* / 3480**	3910* / 4400**	4220* / 4850**
A	mm	2120	2400	2420	2800	2850	3050
Height Closed Jaws	mm	1615	1735	1915	2130	2165	2280
C	mm	1020	1205	1205	1500	1500	1650
Width Closed Jaws	mm	1310	1360	1385	1540	1780	1860
E	mm	1405	1450	1660	1750	1880	1935
n° cylinders	n°	2	2	2	2	2	2
Cap SAE	m³	0,8	0,95	1,0	1,3	1,5	1,8
Excavator working pressure	bar	350	350	350	350	350	350
Rotation oil flow capacity	l/min.	170	170	200	200	250	250
Rotation Pressure	bar	210	210	210	210	250	250
Rotation oil flow capacity	l/min.	10 / 20***	15 / 30***	15 / 30***	15 / 30***	15 / 30***	15 / 30***

* PSGWITH STANDARD JAW

** PSG WITH DEMOLITION JAW

*** DOUBLE MOTOR



SEE MORE