


MULTI-PURPOSE GRABS

for excavators from 1 to 52 ton


Grab up everything!

Replaceable wear plates (400hb).
Robust and fully integrated rotation.
Relief valve for hydraulic rotation.
Cylinder fully protected from possible debris during demolition.
Opening/Closing lock valve ***optional**.

Kit for two hydraulic lines system
(GR15-GR75) *optional.
This kit can only be purchased at the moment of the order. It is not possible to add this kit after the product installation.

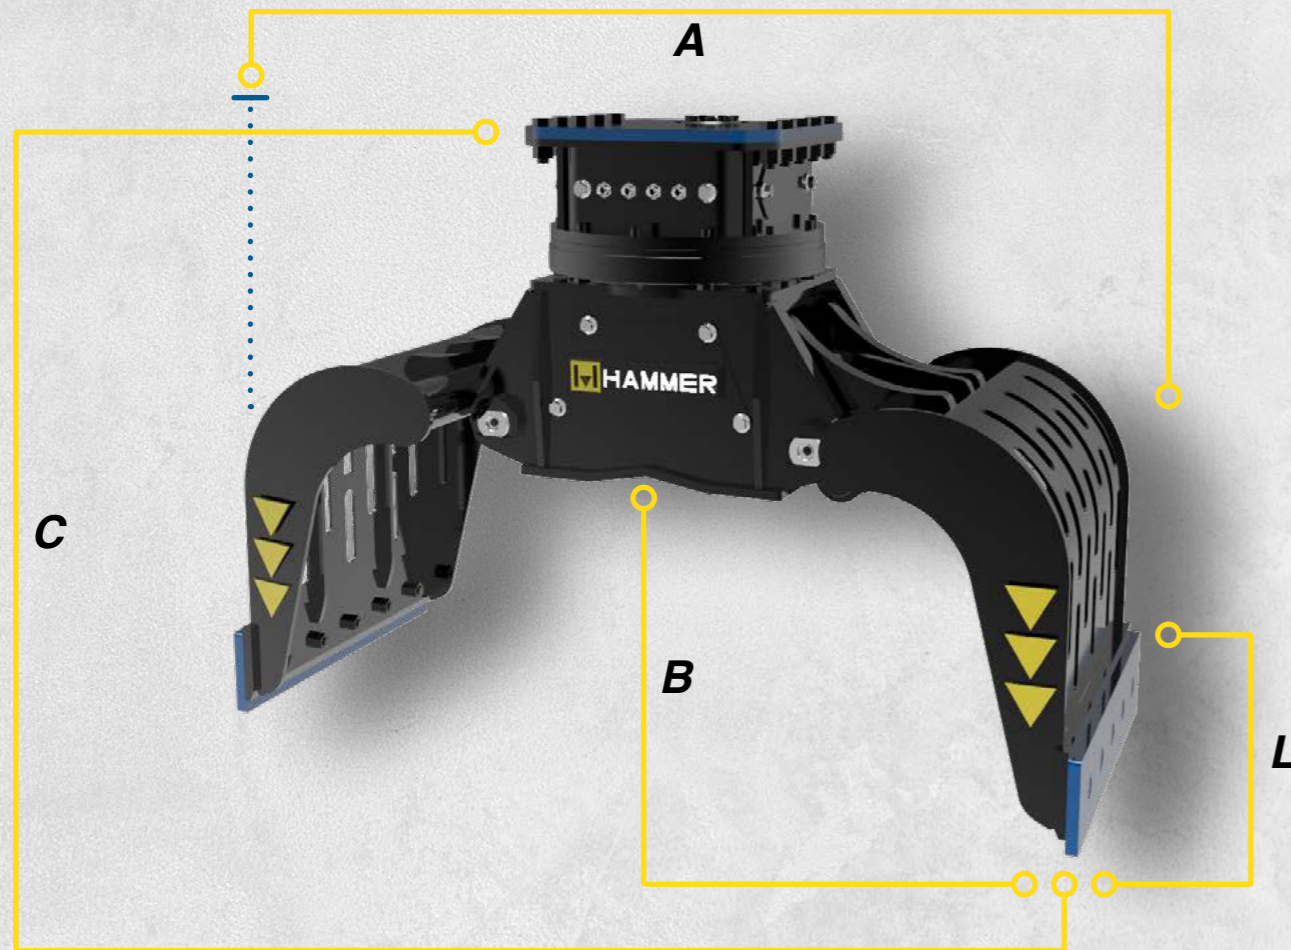


THE NEW MULTI PURPOSE GRABS OF GR SERIES ARE DESIGNED FOR HANDLING, RECYCLING AND SMALL DEMOLITIONS.



Mining & Quarring




Demolition & Renovation



Metallurgic Industry



Construction



Recycling

Models		GR10	GR15	GR25	GR45
Carrier weight	t	1-3	1.5-4	4-7	5-12
Weight + Standard Jaw	kg	93	145	240	480
Weight + Demolition Jaw	kg	/	155	310	560
Weight + Teeth Jaw	kg	/	155	245	480
Excavator oil flow capacity	l/min	14	15	20	25
Excavator working pressure	bar	180	200	250	250
360° Rotation	°	360°	360°	360°	360°
Rotation oil flow capacity	l/min	8-16	10-20	10-20	15-25
Rotation Pressure	bar	80	100	100	100
A	mm	700	925	1170	1500
B	mm	270	300	370	470
C	mm	680	700	825	1045
L	mm	300	400	500	600

Models		GR75	GR100	GR150	GR210
Carrier weight	t	7-16	13-19	17-30	25-45
Weight + Standard Jaw	kg	700	1000	1500	1890
Weight + Demolition Jaw	kg	980	1380	1750	/
Weight + Teeth Jaw	kg	710	1000	1510	/
Excavator oil flow capacity	l/min	45	50	75	170
Excavator working pressure	bar	250	300	300	310
360° Rotation	°	360°	360°	360°	360°
Rotation oil flow capacity	l/min	15-25	40-60	40-60	30
Rotation Pressure	bar	100	100	100	210
A	mm	1635	1780	1950	2400
B	mm	520	570	675	690
C	mm	1130	1225	1550	1450
L	mm	700	800	1020	1250

All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.



▶ GR SERIES

MULTI-PURPOSE GRABS

for excavators from 1 to 52 ton

Grab up everything!

Replaceable wear plates (400hb).
 Robust and fully integrated rotation.
 Relief valve for hydraulic rotation.
 Cylinder fully protected from possible debris during demolition.
 Opening/Closing lock valve **optional*.

Kit for two hydraulic lines system **(GR15-GR75) *optional**.
This kit can only be purchased at the moment of the order. It is not possible to add this kit after the product installation.




▼
GR + STANDARD JAW



Mining & Quarring




Demolition & Renovation



Metallurgic Industry



Construction



Recycling



▼
GR + DEMOLITION JAW



▼
GR + TEETH JAW



ALL THE PARTS THAT MOSTLY UNDERGO WEARING ARE EASILY REPLACEABLE



CURB HANDLING KIT



FULL SIDE CLOSING KIT



TOOTHED SIDE CLOSING KIT

▶ THE NEW MULTI PURPOSE GRABS OF GR SERIES ARE DESIGNED FOR HANDLING, RECYCLING AND SMALL DEMOLITIONS.

All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.

