

Eos Family Control



Type(s)
Project
Date
Notes

GENERAL INFORMATION

The Target Key 10 (TK 10) button accessory brings the power of Apex Target Keys in a portable form factor for exceptional control on any Eos Family device. The USB-connected bank has ten buttons with displays, allowing fast, tactile input that changes as you program, whether from your console, remote video station, or control room. Include labels, images, and navigational elements - all that move as quickly as you do. And with its rugged design and 3D-printable clip-on accessories, TK 10 is just as comfortable tossed in a bag for your next ETCnomad gig as it is sitting next to a console.

Need a permanent option for that comms rack, or for users who need to operate programming without navigating the full Eos interface? TK 10 also comes in a 1U 19" rackmount version, allowing you to build out customized, approachable, and rugged control.

Eos Family software includes:

- Approachable yet powerful syntax for programmers of every level
- Industry-leading color control tools
- Magic Sheets for custom programming and displays
- Augment3d 3D programming and visualization environment
- Virtual Media Server function for pixel-mapping
- Timecode and automation integration
- Multi-user and multi-programmer working environment

For drawings, photos, and more, visit the [Eos TK 10](https://www.etcconnect.com/eos) product webpage. To explore the latest software features, accessories, and other Eos Family products, visit [etcconnect.com/eos](https://www.etcconnect.com/eos).

ORDERING INFORMATION

Eos TK 10

MODEL	DESCRIPTION	PART NUMBER
TK 10	Target Key 10 Portable Accessory	4450A1051
TK 10-RM	Target Key 10 Rackmount Accessory	4450A1061

PORTABLE SHIPS WITH:

- One 6-foot USB C cable
- USB A to USB C adapter

RACKMOUNT SHIPS WITH:

- One 6-foot USB C cable
- USB A to USB C adapter
- 1U 19-inch rack chassis (installed)
- Mounting hardware



SPECIFICATIONS

HARDWARE AND INTERFACES

- Portable and 1U 19-inch rack-mount form factor
- Ten LCD RGB-color customizable display buttons
- One USB C 3.0 port for power and data
- 3D-printable accessory files available on ETC's website

ELECTRICAL AND THERMAL

- Ambient room temperature 0°C to 35°C (32°F to 95°F)
- Ambient humidity up to 90% non-condensing

REGULATORY AND COMPLIANCE


- CE compliant

PHYSICAL

Eos TK 10 Dimensions and Weights *

MODEL	HEIGHT		WIDTH		DEPTH		WEIGHT	
	mm	in	mm	in	mm	in	kg	lb
TK 10	52	2.03	246	9.67	46	1.82	0.66	1.45
TK 10-RM	44	1.72	483	19	46	1.82	0.54	1.20

* Dimensions and weights typical

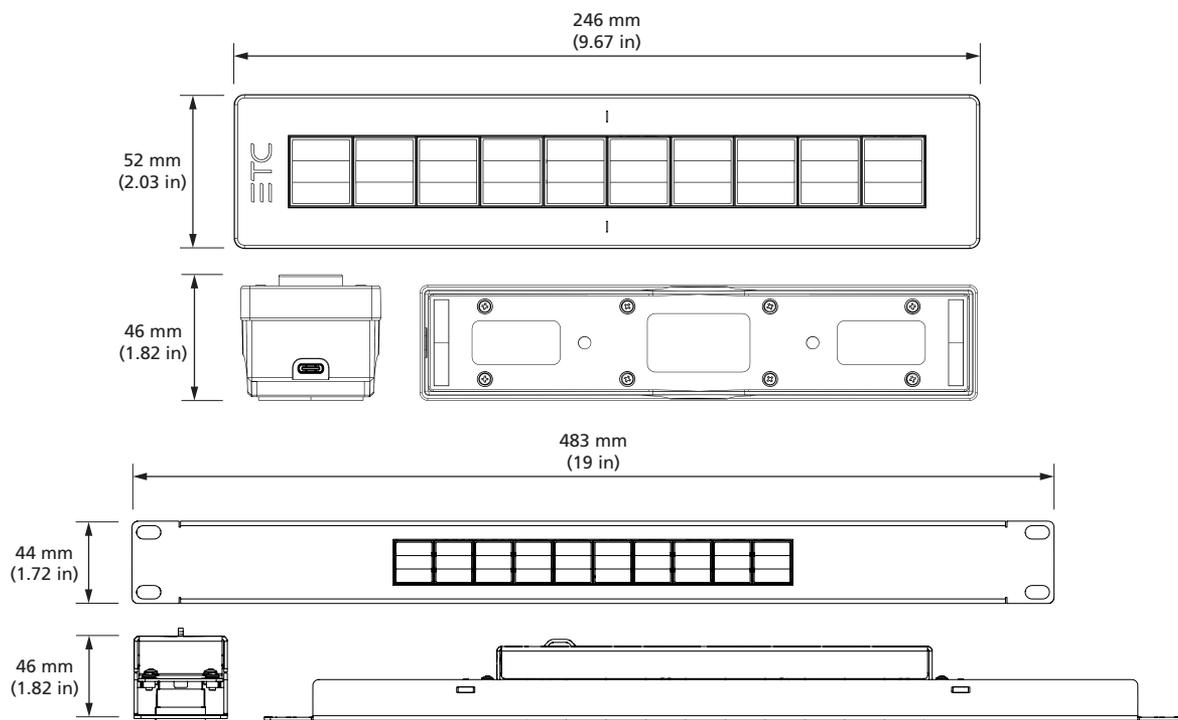

Corporate Headquarters • Middleton, WI USA
Global Offices • London, UK • Rome, IT • Holzkirchen, DE • Paris, FR • Hong Kong
 Dubai, UAE • Singapore • New York, NY • Orlando, FL • Los Angeles, CA • Austin, TX
 ©2025 ETC. All Rights Reserved. All product information and specifications subject to change. Rev A 2025-MM
 *Trademark and patent info: etconnect.com/IP • Third-party license agreement info: etconnect.com/licenses